


Technical Data

Materials

Body	Brass Nickle Plated
Cap	Brass Nickle Plated
Seal	CR (Chloroprene Rubber)
Clamp Insert	Polyamide 6
O-Ring	NBR
Flammability	V2 (According to UL94)
Protection Class	IP68 - 5 bar
Operating Temperature	
Permanent	-20 C up to +100 C
Intermittent	-40 C up to +150 C
Attachment Thread	DIN 40430

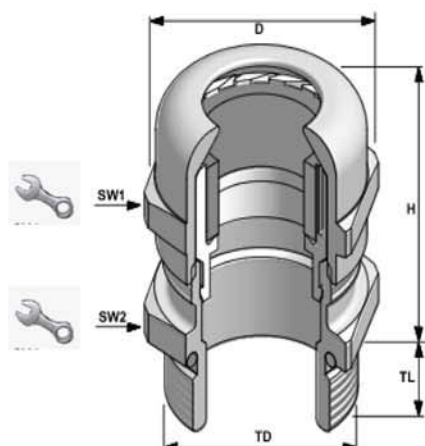

Thread Type	Cable Dia. mm	TL mm	TD mm	SW 1 mm	SW 2 mm	Max. H mm	D mm	Model
PG 7	3.0 - 6.5	6.0	12.5	14.0	14.0	21.8	15.5	BSBC-01
		10.0						BSBE-01
PG 9	4.0 - 8.0	6.0	15.2	17.0	17.0	22.6	18.9	BSBC-02
		10.0						BSBE-02
PG 11	5.0 - 10.0	6.0	18.6	20.0	20.0	25.3	22.0	BSBC-03
		10.0						BSBE-03
PG 13.5	6.0 - 12.0	6.5	20.4	22.0	22.0	24.1	24.5	BSBC-04
		10.0						BSBE-04
PG 16	10.0 - 14.0	6.5	22.5	24.0	24.0	27.5	26.8	BSBC-05
		10.0						BSBE-05
PG 21	13.0 - 18.0	7.2	28.3	30.0	30.0	31.2	33.0	BSBC-06
		12.0						BSBE-06
PG 29	18.0 - 25.0	8.0	37.0	40.0	40.0	39.3	44.5	BSBC-07
		12.0						BSBE-07
PG 36	22.0 - 32.0	9.0	47.0	50.0	50.0	47.2	55.5	BSBC-08
		14.0						BSBE-08
PG 42	30.0 - 38.0	12.0	54.0	58.0	58.0	47.7	64.0	BSBC-09
		16.0						BSBE-09
PG 48	34.0 - 44.0	14.0	59.3	64.0	64.0	52.0	70.0	BSBC-10
		18.0						BSBE-10